



BS 24

POWER SUPPLY WITH BACK UP 24VOLTS


MOUNTING INSTRUCTIONS

WIRING DIAGRAM AND INSTRUCTIONS

Remove the screws from the sides of the top cover.

Insert the wires through the appropriate holes.

Use the holes at the bottom of the casing for mounting the power supply on the wall.

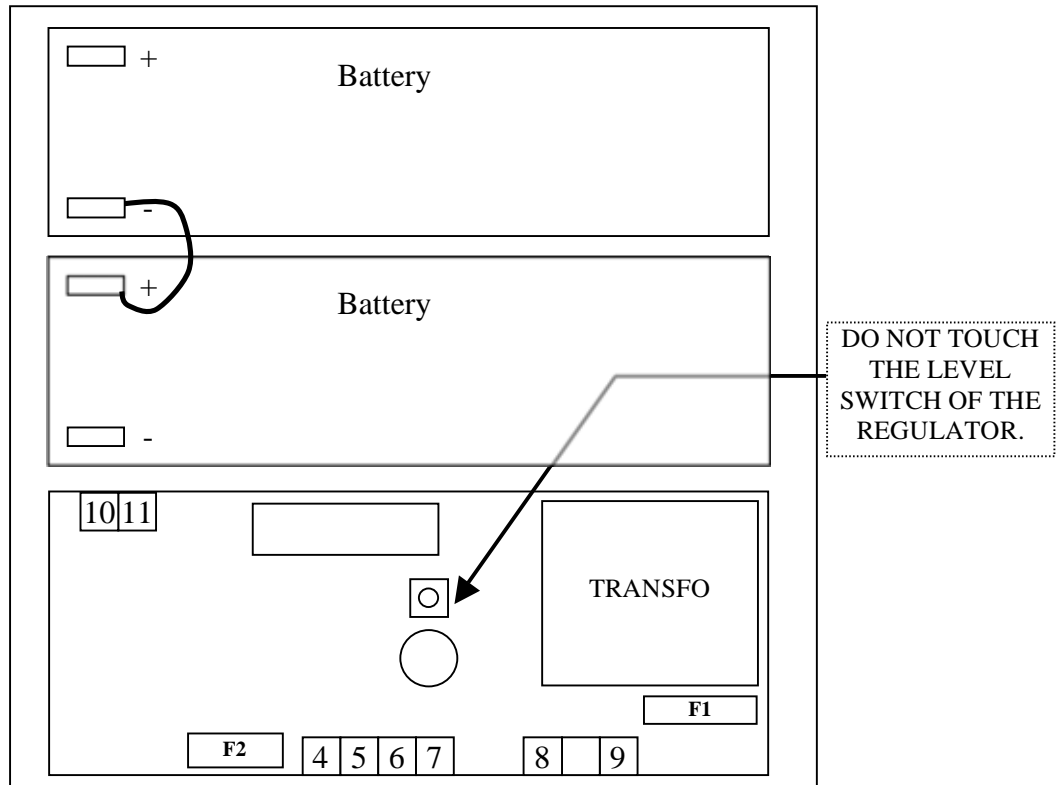

F1	Primary fuse 1 A
F2	Secondary fuse 2 A

Terminal block	Supply
4	+ 24 V =
5	0 V
6	24 V ~
7	24 V ~
8	230 V~
9	230 V~
10	- Battery
11	+ Battery

DO NOT FORGET TO CONNECT THE RED WIRE OF THE BATTERY.