




# BSM60

Y2K  
COMPLIANT

## POWER SUPPLY WITH BATTERY BACKUP

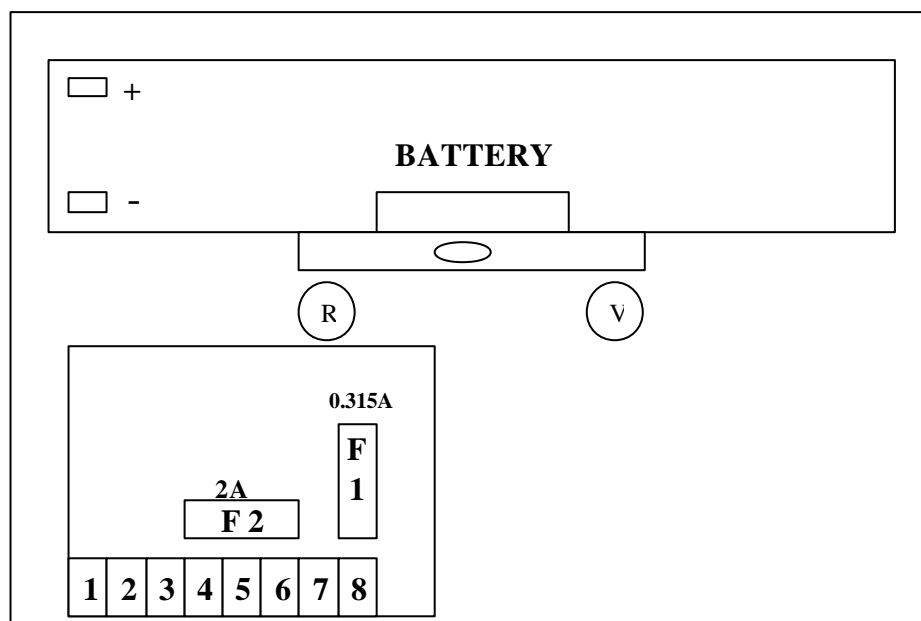

- . Terminal 1 et 2 : 12 V AC (without backup)
- . Terminal 5 : Minus } with backup
- . Terminal 6 : Plus }
- . Terminal 7 et 8 : Input 230V AC

F1 : Fused primary input 0.315A

F2 : Fused secondary output 2A

Red LED : AC Input present

Green LED : Battery present

## MOUNTING INSTRUCTIONS

Remove the screw in the centre of the top cover.

For a wall mounting of the power supply, use the 4 four mounting hole.

Use the cable access hole for the wiring.

**DO NOT TOUCH THE SWITCH**

**DO NOT FORGET TO CONNECT BACK THE RED CABLE ON THE BATTERY**